

The machine generation of the future

Film packaging machine

servo X

more ergonomic – more flexible – simpler




Your advantages:

- product infeeding with unequal gaps or various product lengths
- packaging of single or stacked products
- copilot function for easy set-up of the complete machine with product data memory
- automatic height and length adjustment of the transverse sealing unit
- servo drives for continuous and safe operation as well as safety PLC
→ referencing is not necessary after opening the safety hoods and most simple set-up
- fine adjustment possible during machine operation
- best service and maintenance friendliness
- hinged film trim winder and electric cabinet which allows best accessibility



Film packaging machine

servo X

Basic layout with belt infeed

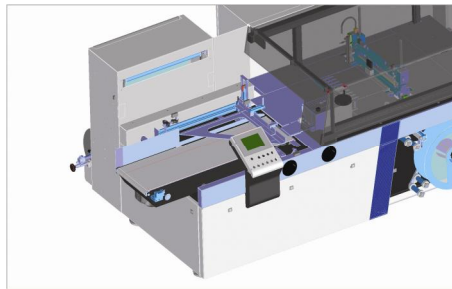

Option: with chain infeed

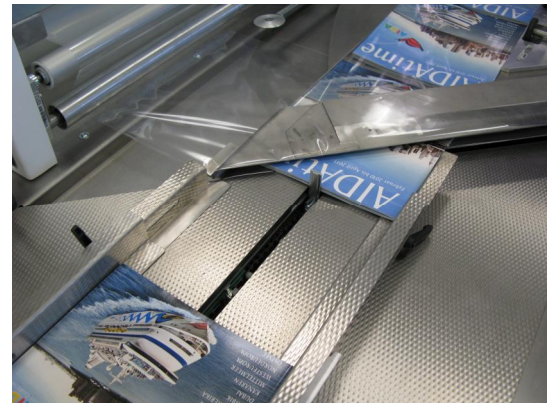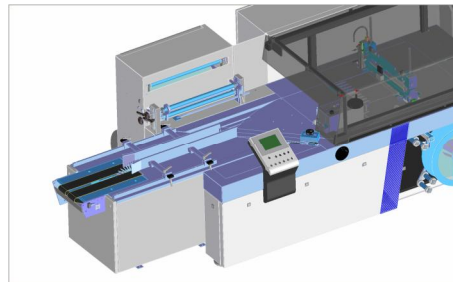

Technical Data:

Product infeed:	manually/automatically in line or stand alone with equal or unequal gaps
Film:	PE, PO, PP, bio films, centre folded and flat film
Product dimensions:	L: 80 - ∞ mm, W: 25 - 450 mm, H = 2 - 250 mm
Operation:	continuous, no stop and go
Capacity range:	5 000 / 8 000 / 10 000 cycles/h
Control:	Siemens SIMOTION with safety-functionality