

PALLET SECURING

- STRETCH WRAPPERS
- TOP SHEET DISPENSERS
- ACCESSORIES



PW-1000 Semi-automatic pallet stretch-wraper

For film with or without pre-stretch.

Simple and efficient machine for the everyday job. The compact size facilitates location and relocation.

The PW-1000 is available for different-sized pallet loads (see table).

Safety

The sealed tower, the emergency stop as well as the safety switch built into the foot plate under the film carriage make the PW-1000 a very safe machine.


The standard equipment includes, among other things:

- Independent setting of film carriage and turntable speed, which makes it possible to fully utilize the film and to determine the extent of film overlap.
- Soft start on turntable. A great advantage where pallet loads are light or fragile. The turntable starts up slowly and then accelerates until the required speed has been reached.
- Memory stores the last used settings for the turntable and film carriage speeds.
- Programme for rainproof pallet stretch-wrapping, offering efficient protection against rain and humidity (requires separate top film application).
- Automatic setting of pallet load height, a photocell registers the height of the pallet load.
- Variable number of wraps at top and bottom available upon selection (1-9).
- Independent setting of turntable and up/down speed of film carriage during operation as required.
- The option of manual operation and, with this, the possibility of choosing, for instance only top wrapping.



Stretch wrappers

Specifications	PW-1000 (621)	PW-1000 (631)	PW-1000 (121)	PW-1000 (131)
Pallet load dimensions				
Max. length (mm)	1200	1200	1200	1200
Max. width (mm)	800	800	1000	1000
Max height (mm)	2360	2860	2360	2860
Max. pallet load (kg)	1500	1500	1000	1000
Machine dimensions				
Length (mm)	2615	2615	2680	2680
Width (mm)	1480	1480	1630*	1630*
Height (mm)	2600	3100	2600	3100
Min. height above floor (mm)	75	75	75	75
Film roll dimension (mm)	Length max. 440-520, outer diameter max. 400, inner diameter 76.			
Capacity	Max. 50 pallets per hour.			
Electric specifications	3 x 230/400 V, 50 Hz, power consumption 0.5 kW. Other specifications upon request.			
Surface treatment	All parts are powder-coated or electro-galvanised.			
Colours	Red RAL 2002, black RAL 9005 (available in other colours at a surcharge).			
*Safety cover required. Subject to alteration.				

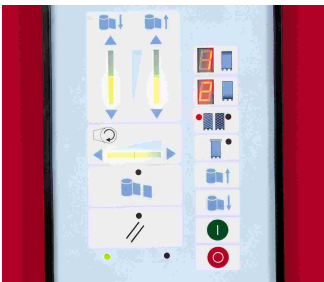

The pallet stretch wrapper is easy to operate and is easily set to achieve optimum pallet load wrapping. Current number of completed wraps is displayed on the control panel.




The control panel can be positioned on the right, left, or rear of the tower.



Fast film change.



Safety switch built into foot plate.

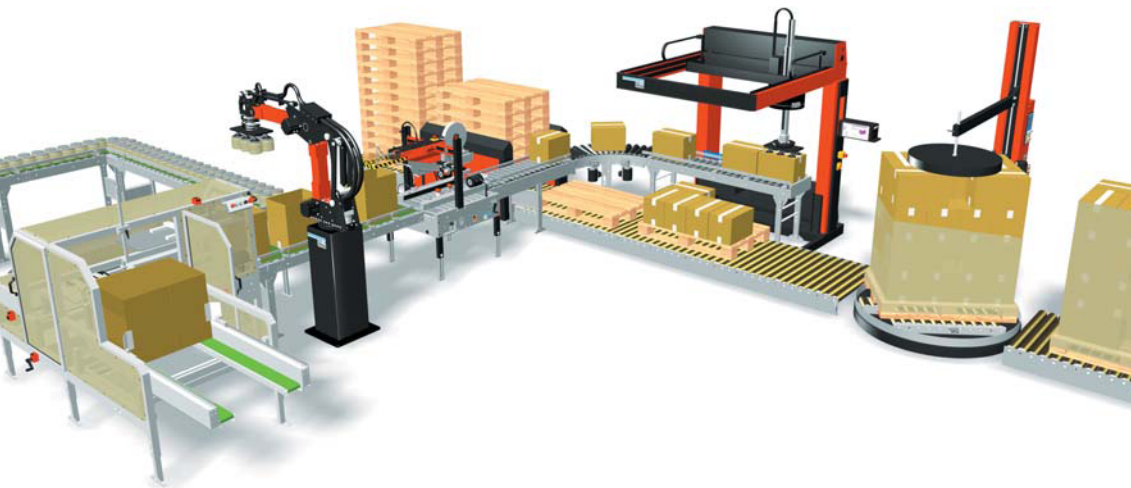

The SOCO SYSTEM

From case erecting to pallet securing

The SOCO SYSTEM product range handles cases, plastic crates, trays, pallets, and many of your products.

The SOCO SYSTEM product range is designed to increase efficiency and eliminate physically strenuous work functions.

One system – one supplier
There are many advantages of full product compatibility; less paperwork and no time wasted in adapting products from different suppliers.

Meet your future requirements
Add modules and functionality, relocate modules, or whatever fits your future needs.

Call us, mail us, or visit us at www.socosystem.com

ARCTEC®

Arctec (Pty) Ltd.

JHB - 4 Barbeque Terrace, Dytchley Road, Kyalami, Midrand
Tel: +27 11 466 2468 | Fax: +27 11 466 2080

CPT - Unit 25 River Edge Business Park, Winelands Close, Stikland, Bellville
Tel: +27 21 946 4745 | Fax: +27 21 946 2405

www.arctec.co.za | info@arctec.co.za

COPYRIGHT SOCO SYSTEM 2006

SOCO SYSTEM

Head office:
SOCO SYSTEM A/S
Helgeshoej Allé 16D
DK-2630 Taastrup
Denmark
Tel +45 43 52 55 66
Fax +45 43 52 81 16
info@socosystem.com
www.socosystem.com



Geberit AG, Switzerland



Sig. Ágústsson, Iceland



Laru, Germany



Toms, Denmark



Rioja, Spain



Bouché Père & Fils, France



United Milk, England



Altmark Käserei, Germany