

# PALLET SECURING

- STRETCH WRAPPERS
- TOP SHEET DISPENSERS
- ACCESSORIES



## PW-1200 Fully-automatic pallet stretch-wraper

PW-1200 is well suited for integration into fully automatic packaging lines.

PW-1200 applies, cuts, and brushes on the film.

### The standard equipment includes, among other things:



- Frequency control system which makes it possible to adjust the machine to different types of pallet loads. This offers a great advantage where pallet loads are light or perhaps fragile. The machine starts up slowly and then accelerates. Independent setting of film carriage and turntable speed.
- Signal communication for control of pallet transport to and from the turntable.
- Adjustable automatic top pressure plate. The top pressure plate can be adjusted to the current maximum load height. This ensures minimal travel of the top pressure plate and increased machine capacity.
- Driven pallet roller conveyor on turntable.
- Film alarm that automatically stops the machine and sends a signal when the film has run out or not been applied.
- Brake motor which stops the turntable in the required position.
- Pre-stretch fully utilises the film. Pre-stretch is 2:1.

### Control system and operation

The PW-1200 is equipped with a unique and user-friendly control system ensuring high productivity at lowest possible costs.


The machine is easy to operate and to set to achieve optimum pallet load wrapping:

- Variable number of wraps at top and bottom upon selection (1-9).
- Independent setting of turntable and up/down movement speed of film carriage during operation.
- Current number of completed wraps is displayed on the control panel.
- Different types of control systems are available.

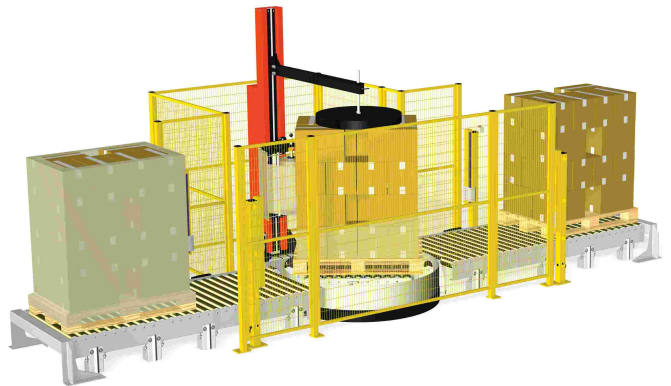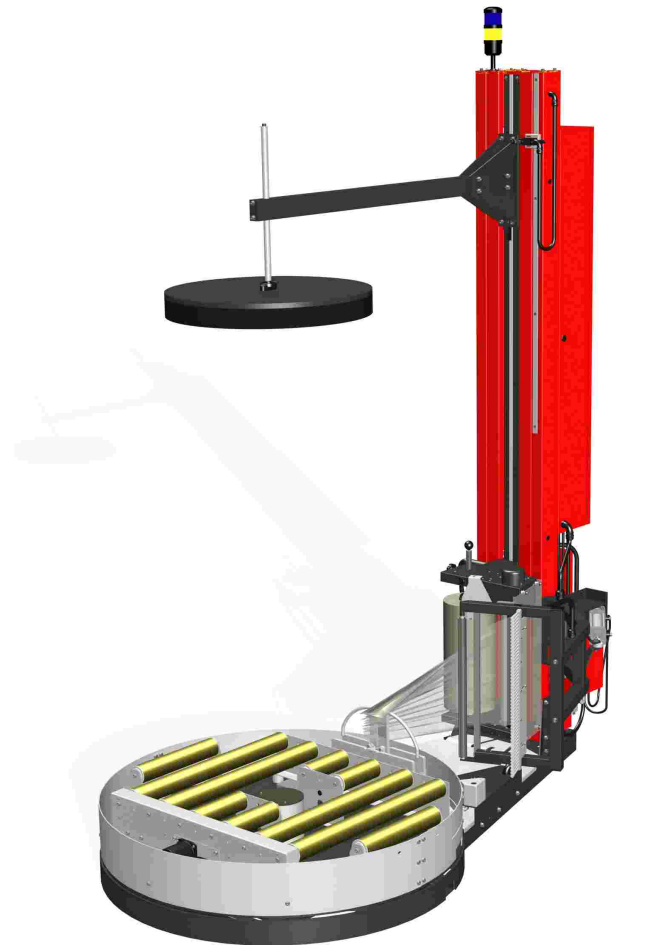

# Stretch wrappers

Specifications	PW-1200 (0812)	PW-1200 (1012)
Pallet load dimensions		
Max. length (mm)	1200	1200
Max. width (mm)	800	1000
Max height (mm)	2030	2030
Min. height (mm)	345	345
Max. pallet load (kg)	1500	1500
Machine dimensions		
Length (mm)	2615	2655
Width (mm)	1480	1630
Height (mm)	3350	3350
Min. height above floor (mm)	350	350
Film roll dimension (mm)	Length max. 440-520, outer diameter max. 400, inner diameter 76.	
Capacity	Max. 35 pallets per hour.	
Electric specifications	3 x 400 V 50 Hz, power consumption 1.0 kW, control voltage 24 V.	
Air	6 l at 6 bar per cycle.	
Surface treatment	All parts are powder coated or electro-galvanised.	
Colours	Red RAL 2002, black RAL 9005 (available in other colours against an additional price).	
Subject to alteration.		

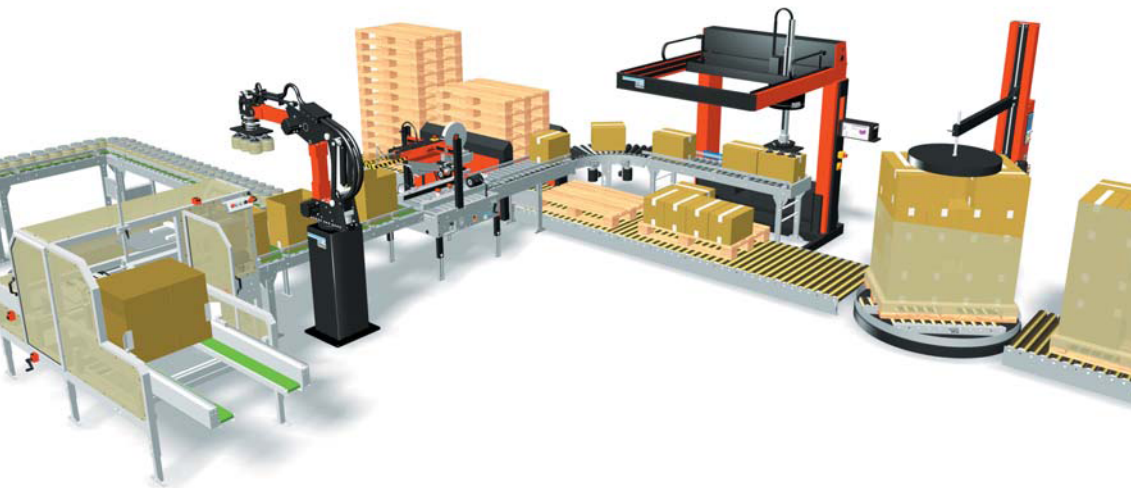

## The SOCO SYSTEM

From case erecting to pallet securing

The SOCO SYSTEM product range handles cases, plastic crates, trays, pallets, and many of your products.

The SOCO SYSTEM product range is designed to increase efficiency and eliminate physically strenuous work functions.

One system – one supplier  
There are many advantages of full product compatibility; less paperwork and no time wasted in adapting products from different suppliers.

Meet your future requirements  
Add modules and functionality, relocate modules, or whatever fits your future needs.

Call us, mail us, or visit us at [www.socosystem.com](http://www.socosystem.com)

# ARCTEC®

### Arctec (Pty) Ltd.

JHB - 4 Barbeque Terrace, Dytchley Road, Kyalami, Midrand  
Tel: +27 11 466 2468 | Fax: +27 11 466 2080

CPT - Unit 25 River Edge Business Park, Winelands Close, Stikland, Bellville  
Tel: +27 21 946 4745 | Fax: +27 21 946 2405

[www.arctec.co.za](http://www.arctec.co.za) | [info@arctec.co.za](mailto:info@arctec.co.za)

COPYRIGHT SOCO SYSTEM 2006

## SOCO SYSTEM

Head office:  
SOCO SYSTEM A/S  
Helgeshoej Allé 16D  
DK-2630 Taastrup  
Denmark  
Tel +45 43 52 55 66  
Fax +45 43 52 81 16  
[info@socosystem.com](mailto:info@socosystem.com)  
[www.socosystem.com](http://www.socosystem.com)



Geberit AG, Switzerland



Sig. Ágústsson, Iceland



Laru, Germany



Toms, Denmark



Rioja, Spain



Bouché Père & Fils, France



United Milk, England



Altmark Käserei, Germany