

SEALING

- SEMI OR FULLY AUTOMATIC
- UNIFORM OR RANDOM CASE SIZES
- TOP AND BOTTOM SEALING
- SIDE OR VERTICAL SEALING
- ACCESSORIES



Case sealers for uniform case sizes

T-400 With automatic flap closure - Top and bottom closure

The machine is constructed for "round-the-clock" operation with minimum service requirements.

The short length of the machine ensures high production capacity and maximum space utilisation. Ideal for integration into fully automatic packaging lines of uniform cases in batches.

Basic Models

The standard version is available in three constructions (see table). All three machines can be fitted with extra-high pillars.

- Easy to adjust for different case sizes.
- Easy tape and dispenser replacement.
- Compact design.
- Combined with feed-in control function, efficient separation and maximum utilisation of the capacity of the case sealer is ensured.
- Easy to maintain with low maintenance and spare parts costs.
- Electro-galvanised or stainless steel finish.




| Specifications | T-400 5-5-7 | T-400 5-8-7 | T-402 5-5-7 | T-402 5-8-7 | T-402 Maxi 7-8-7 |
|--------------------------|--------------------------------------------------------------------------------------------------------------------------|-----------------|-----------------|-----------------|------------------|
| Case dimensions* | | | | | |
| Max. (LxWxH) mm | 550 x 460 x 470 | 550 x 460 x 770 | 750 x 460 x 470 | 750 x 460 x 770 | 750 x 710 x 625 |
| Min. (LxWxH) mm | 200 x 120 x 95 | 200 x 120 x 95 | 200 x 120 x 95 | 200 x 120 x 95 | 200 x 170 x 125 |
| Tape overlap | | | | | |
| 70 mm | ● | ● | ● | ● | ● |
| 50 mm | ○ | ○ | ○ | ○ | ○ |
| Tape width | | | | | |
| 25 - 30 mm | ○ | ○ | ○ | ○ | ○ |
| 38 - 50 mm | ● | ● | ● | ● | ○ |
| 50 - 75 mm | ○ | ○ | ○ | ○ | ● |
| Side drives | | | | | |
| Height 50 mm | ● | ● | ● | ● | ○ |
| Height 80 mm | ○ | ○ | ○ | ○ | ● |
| Working height max./min. | | | | | |
| 920 - 820 mm | ○ | ○ | ○ | ○ | ○ |
| 820 - 720 mm | ○ | ○ | ○ | ○ | ○ |
| 720 - 620 mm | ● | ● | ● | ● | ● |
| 620 - 520 mm | ○ | ○ | ○ | ○ | ○ |
| 520 - 420 mm | ○ | ○ | ○ | ○ | ○ |
| Weight kg | 175 | 175 | 175 | 175 | 220 |
| Capacity* | Max. 18/min. | | | | |
| Electric specifications | 3 x 230/400 V, 50-60 Hz, or 3 x 415/460 V, 50-60 Hz. Connected load 0.3 kW. Other specifications available upon request. | | | | |
| Air consumption | Max. 0.6 l at 6 bar per case. | | | | |
| Tape diameter | Max. 385 mm. | | | | |

● Standard ○ Optional

* Depending on the construction and quality of the case.

Subject to alteration.

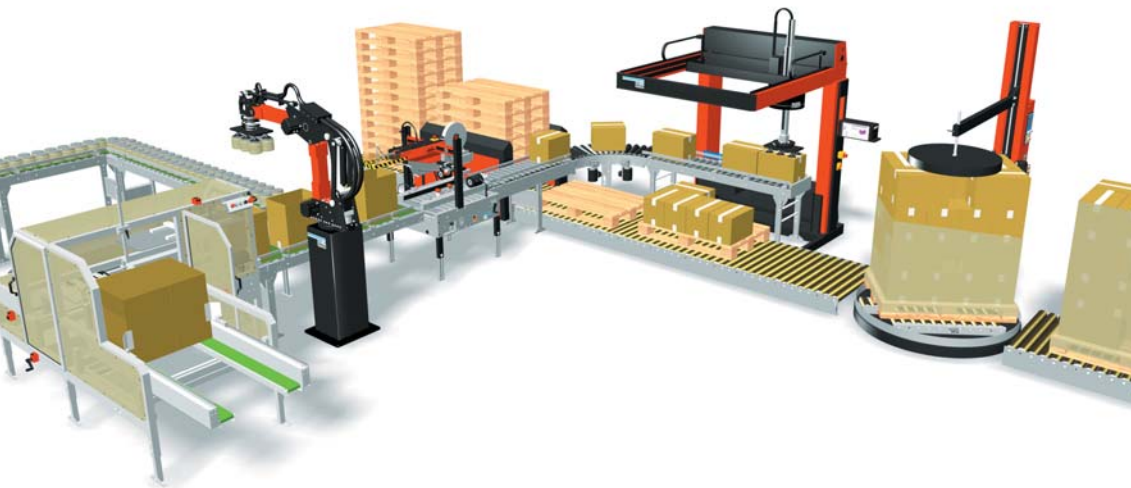

The SOCO SYSTEM

From case erecting to pallet securing

The SOCO SYSTEM product range handles cases, plastic crates, trays, pallets, and many of your products.

The SOCO SYSTEM product range is designed to increase efficiency and eliminate physically strenuous work functions.

One system – one supplier

There are many advantages of full product compatibility; less paperwork and no time wasted in adapting products from different suppliers.

Meet your future requirements

Add modules and functionality, relocate modules, or whatever fits your future needs.

Call us, mail us, or visit us at www.socosystem.com



Your local SOCO SYSTEM dealer:

Arctec (Pty) Ltd.
P.O. Box 70636, Bryanston, 2021

11 Barbeque Terrace
Dytchley Road, Kyalami
Midrand, South Africa

S26° 00' 09.11" E28° 04' 22.18"

COPYRIGHT SOCO SYSTEM 2006



Head office:
SOCO SYSTEM A/S
Helgeshoej Allé 16D
DK-2630 Taastrup
Denmark
Tel +45 43 52 55 66
Fax +45 43 52 81 16
info@socosystem.com
www.socosystem.com



Geberit AG, Switzerland




Sig. Ágústsson, Iceland



Laru, Germany



Toms, Denmark



Rioja, Spain



Bouché Père & Fils, France



United Milk, England



Altmark Käserei, Germany