
# **SEALING**

- SEMI OR FULLY AUTOMATIC
- UNIFORM OR RANDOM CASE SIZES
- TOP AND BOTTOM SEALING
- SIDE OR VERTICAL SEALING
- Accessories

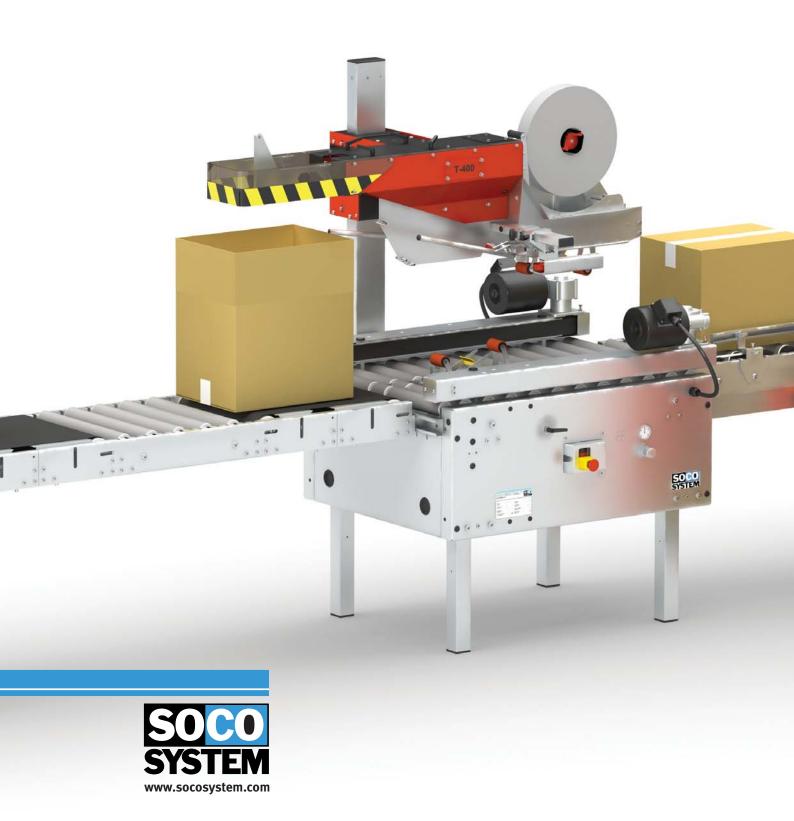

## TT-10 For flat items - Top closure

TT-10 is designed to handle primarily flat items such as graphics, mirrors, cabinet doors, half-knock-down furniture, book parcels, etc. requiring top taping only.

#### **Basic models**

TT-10 and TT-10 Maxi (see table).

#### TT-10 Top and bottom sealer

The brush unit can be removed without the use of tools and replaced by a standard dispenser. In this way, the TT-10 can be used as a top and bottom sealer for traditional cases.

- Easy to adjust for different case sizes.
- Easy tape and dispenser replacement.
- Easy to maintain with low mainteance and spare parts costs.
- Electro-galvanised finish.




Specifications	TT-10 5-5-7	TT-10 Maxi 7-5-7
Case dimensions*		
Max. (LxWxH) mm	∞ x 670 x 200	∞ x 880 x 200
Min. (LxWxH) mm	140 x 150 x 10	140 x 200 x 10
Tape overlap		
70 mm	0	0
50 mm	•	•
Tape width		
25 - 30 mm	0	0
38 - 50 mm	•	•
Working height max./min.		
920 - 820 mm	0	0
820 - 720 mm	0	0
720 - 620 mm	•	•
620 - 520 mm	0	0
520 - 420 mm	0	0
Weight kg	165	170
Capacity*	Max. 30 cases/ min.	
Electric specifications	$3 \times 230/400 \text{V}$ , 50-60 Hz or $3 \times 415/460 \text{V}$ , 50-60 Hz. Connected load 0.3 kW. Other specifications available upon request.	
Air consumption	Max. 0.3 l at 6 bar per case.	
Tape diameter	Max. 385 mm.	
Standard		

ullet Standard  $\circ$  Optional

Subject to alteration.

<sup>\*</sup> Depending on the construction and quality of the case.

## Case sealers for uniform case sizes



**Top dispenser** Modified dispenser from SOCO SYSTEM's complete programme. Available for tape widths of 38-50 mm.




Double drive belts
Double drive belts at top also
provide an effective system for
comparatively heavy products
handled in the paper and
furniture industries. As an extra
precaution, the top drive is
fitted with an inlet security to
stop the machine in case of
fingers becoming trapped
between the case and the top
drive.



Efficient brush system SOCO SYSTEM's unique brush system in the roller table ensures that the tape overlap is brushed down onto the underside of the case.



Sideguides
The compact side guide
arrangement makes it possible
to seal cases which are only a
few millimetres high. At the
same time, it is designed to
handle very heavy cases.

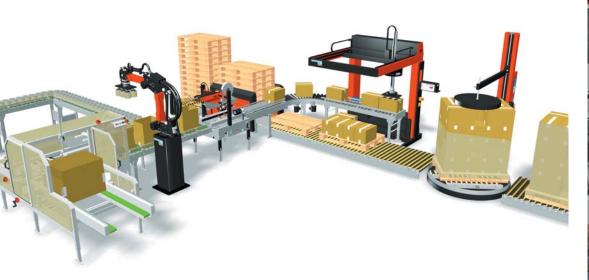

# The SOCO SYSTEM

## From case erecting to pallet securing

The SOCO SYSTEM product range handles cases, plastic crates, trays, pallets, and many of your products.

The SOCO SYSTEM product range is designed to increase efficiency and eliminate physically strenous work functions.

## One system – one supplier

There are many advantages of full product compatibility; less paperwork and no time wasted in adapting products from different suppliers.

## Meet your future requirements Add modules and functionality, relocate modules, or whatever fits your future needs.

Call us, mail us, or visit us at www.socosystem.com



Your local SOCO SYSTEM dealer:

P.O. Box 70636, Bryanston, 2021

11 Barbeque Terrace Dytchley Road, Kyalami Midrand, South Africa

S26° 00' 09.11" E28° 04' 22.18"



**Head office:** SOCO SYSTEM A/S Helgeshoej Allé 16D DK-2630 Taastrup Denmark Tel +45 43 52 55 66 Fax +45 43 52 81 16 info@socosystem.com

www.socosystem.com





aru, German





Rioja, Spain





United Milk, England

